



## IN-CEILING SPEAKERS DCS 52KV/ DCS 62KV

FRONT VIEW OF THE DCS 62KV WOOFER WITH KEVLAR CONE AND 1" PIVOTABLE FERROFLUID COOLED SILK DOME TWEETER




FRONT VIEW OF SPEAKERS WITH SNAP FIT MAGNETIC ROUND GRILLE



VIEW OF THE 6.5" KEVLAR CONE WOOFER AND THE 1" PIVOTABLE FERROFLUID COOLED SILK DOME TWEETER



REAR VIEW OF DCS 62KV SPEAKER WITH LARGE WOOFER MAGNET 90mm x 17mm, HIGH PERFORMANCE CROSSOVER AND DOG EARS FOR MOUNTING

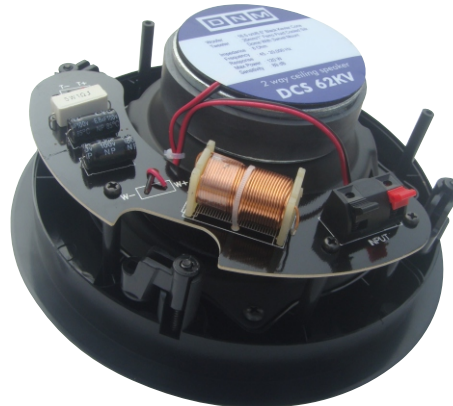

VIEW OF THE DCS 52KV KEVLAR CONE WOOFER AND THE 0.75" PIVOTABLE FERROFLUID COOLED SILK DOME TWEETER



### COMMON FEATURES ON ALL ABOVE MODELS:

- 2 WAY SPEAKERS THAT IDEALLY SUIT ANY HI-FI STEREO/ HOME THEATRE AND BACKGROUND MUSIC INSTALL SOUND APPLICATION
- HIGH QUALITY BLACK KEVLAR CONES WITH FERRO FLUID COOLED SILK DOME TWEETERS
- MAGNETIC GRILLE AND DOG EARS FOR EFFORTLESS CEILING MOUNTING

	<b>DCS 52KV</b>
Woofer	5-1/4" Black Kevlar Cone
Tweeter	3/4" ferrofluid cooled silk dome with swivel mount
Power handling	60 Watts Peak
Frequency response	50 - 20,000Hz
Sensitivity	89dB@1W/1M
Impedance	8 Ohms
Outer Dimensions Dia. X Depth	179 mm x 79 mm
Cutout size(Dia)	160 mm
Mounting depth	77 mm

	<b>DCS 62KV</b>
Woofer	6-1/2" Black Kevlar cone
Tweeter	1" ferrofluid cooled silk dome with swivel mount
Power handling	120 Watts Peak
Frequency response	45 - 20,000Hz
Sensitivity	89dB@1W/1M
Impedance	8 Ohms
Outer Dimensions Dia. X Depth	250 mm x 98 mm
Cutout size(Dia)	209 mm
Mounting depth	95 mm

Note: As part of our continuing programme to improve the design and quality of our products we shall be free to make changes in the design and specifications without any notice.