


PACE

IN WALL/ON WALL SPEAKER LCR626KV

IDEAL SPEAKER FOR HOME THEATRE AND INSTALL SOUND APPLICATIONS

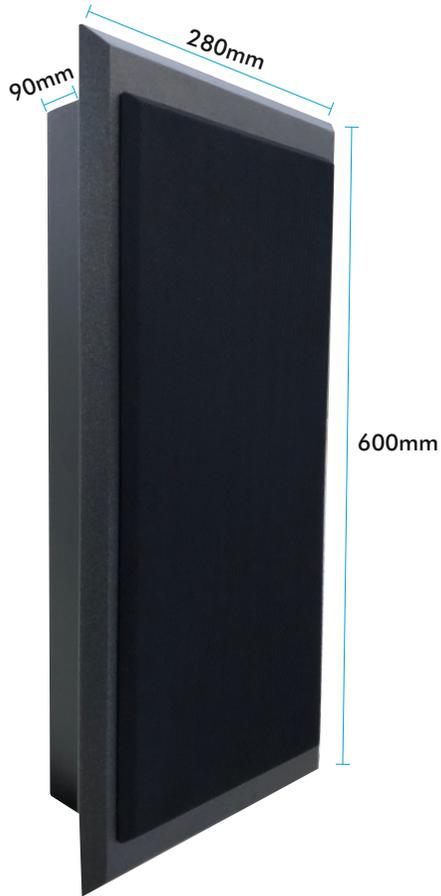

SIDE VIEW OF THE SPEAKER



FRONT VIEW OF THE SPEAKER
WITH MAGNETIC GRILL



FRONT VIEW OF THE SPEAKER
WITHOUT MAGNETIC GRILLE



REAR VIEW OF THE SPEAKER

- 2 WAY SPEAKER USING 2 X 6.5" KEVLAR CONE WOOFER AND 1" FERRO FLUID COOLED SILK DOME TWEETER
- 120 WATT PEAK POWER SPEAKER HAVING 8 OHM IMPEDANCE
- FREQUENCY RESPONSE : 60 – 20000 Hz
- SENSITIVITY: 88 dB
- DIMENSIONS : FRONT BAFFLE : 600mm HEIGHT X 280mm WIDTH X 18mm THICKNESS
BACK BOX : 540mm HEIGHT X 207mm WIDTH X 90mm DEPTH

Note: As part of our continuing programme to improve the design and quality of our products we shall be free to make changes in the design and specifications without any notice.



CREATE A CAVITY IN
THE CONCRETE WALL
OR FALSE WOODEN WALL
AS PER ABOVE PICTURE



SLIDE THE SPEAKER INTO
THE CAVITY AFTER AFFIXING
SINGLE SIDED ADHESIVE TAPE
ON THE EDGES OF
THE SPEAKER THAT WILL MAKE
CONTACT WITH THE WALL



IN CASE THE SPEAKER
CANNOT BE SLID IN FULLY,
IT CAN BE LEFT AS ABOVE
PICTURE AND THE
SURROUNDING AREA
CAN BE USED TO
CREATE BACKLIGHTING
EFFECT USING ROPE
LIGHTS OR SIMILAR



THE SPEAKER FULLY
MOUNTED IN THE CAVITY